SUNMI T3 PRO Smart Desktop Terminal

The next level of Android desktop.







Flagship performance unlocks extraordinary user experience.

High performance octa-core 6nm processor, up to 2.7Ghz. Equipped with large-capacity memory of 6GB RAM+128GB ROM delivers premium-tier features.

Pioneering in engineering.

The sleek yet durable aluminum alloy design strikes the perfect balance between weight, ruggedness and outlook. Bezel-less high definition display, comes with high-transparency anti-fingerprint coating.

Interactive design for an ultimate user perception.

Designed with NFC tab on screen for both the main screen and customer facing screen (optional). Easily detachable customer display that comes with a 1.5m extension cord to improve flexibility.

Have your device tailored to your brand.

Apply your logo and brand color to the device to show your brand personality.

Display Options

15.6" +10.1" Main 15.6" FHD,1920*1080 Secondary 10.1" HD, 1280*800



15.6" +15.6"Main 15.6" FHD,1920*1080
Secondary 15.6" FHD,1920*1080




15.6"Single 15.6" FHD,1920*1080



Flipable Main Display





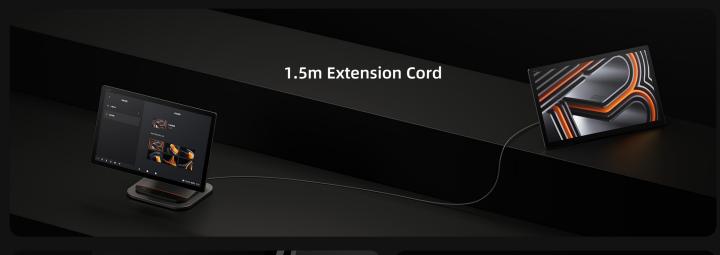





SUNMI T3 PRO Tech Specs

Product Model

L15B1

os

SUNMI OS (based on Androi<u>d 13)</u>

CPU

Kyro-670 Qualcomm cota-core up to 2.7GHz

Memory

6GB RAM+128GB ROM

Display

15.6" FHD 1920*1080 400nits, anti-fingerprint (AF)

Camera

Front camera, single lens,

Card Reader

NFC under the screen

External Memory

1*MicroSD (TF card) Up to 2TB supported

Speaker

2* 2W

Network

LAN 1000M

Wi-Fi

2.4GHz & 5GHz & 6GHz IEEE 802.11 a/b/g/n/ac/ax supported

Bluetooth

Bluetooth 5.2 and BLE supported BT Long Range (farthest distance 200m) supported

Indicator Light

Power indicator light

Buttons

1*Power button (lock screen and fingerprint recognition 1*Download button (hidden hole)

Ports

3*USB 2.0 Type A port 1*USB 3.0 Type A port 1*USB Typc C 2*Micro USB port 1* Micro-USB debug port 1*RJ45 1*RJ11 1*RJ12 1*DC

Accessories

15.6" separate monitor, FHD 1920*1080 10.1" separate monitor, HD 1280*800

Power Adapter

Input: AC 100~240V/1.7A Output: DC 24V/2.5A

Dimensions (L*W*H)

298mm*371.5mm*170mm

Weight

T3 PRO: 3.3kg 15.6" separate monitor: 1.7kg 10.1" separate monitor: 0.9kg

Environment

Operating temp.: 0°C~40°C Storage temp.: -20°C ~60°C